




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁴ : H04M 11/00, H04B 15/00, 1/10 H04L 5/00, 25/08, H04B 1/10		A1	(11) International Publication Number: WO 86/ 07223 (43) International Publication Date: 4 December 1986 (04.12.86)
(21) International Application Number: PCT/US86/00983 (22) International Filing Date: 5 May 1986 (05.05.86) (31) Priority Application Number: 736,200 (32) Priority Date: 20 May 1985 (20.05.85) (33) Priority Country: US (71) Applicant: TELEBIT CORPORATION [US/US]; 10440 Bubb Road, Cupertino, CA 95014 (US). (72) Inventor: HUGHES-HARTOGS, Dirk ; 2220 Rolling Hills Drive, Morgan Hill, CA 95037 (US). (74) Agent: ALLEN, Kenneth, R.; Townsend and Town- send, One Market Plaza, San Francisco, CA 94105 (US).		(81) Designated States: AT (European patent), AU, BE (Eu- ropean patent), BR, CH (European patent), DE (Eu- ropean patent), DK, FR (European patent), GB (Eu- ropean patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), NO, SE (European patent). Published With international search report.	

(54) Title: ENSEMBLE MODEM STRUCTURE FOR IMPERFECT TRANSMISSION MEDIA

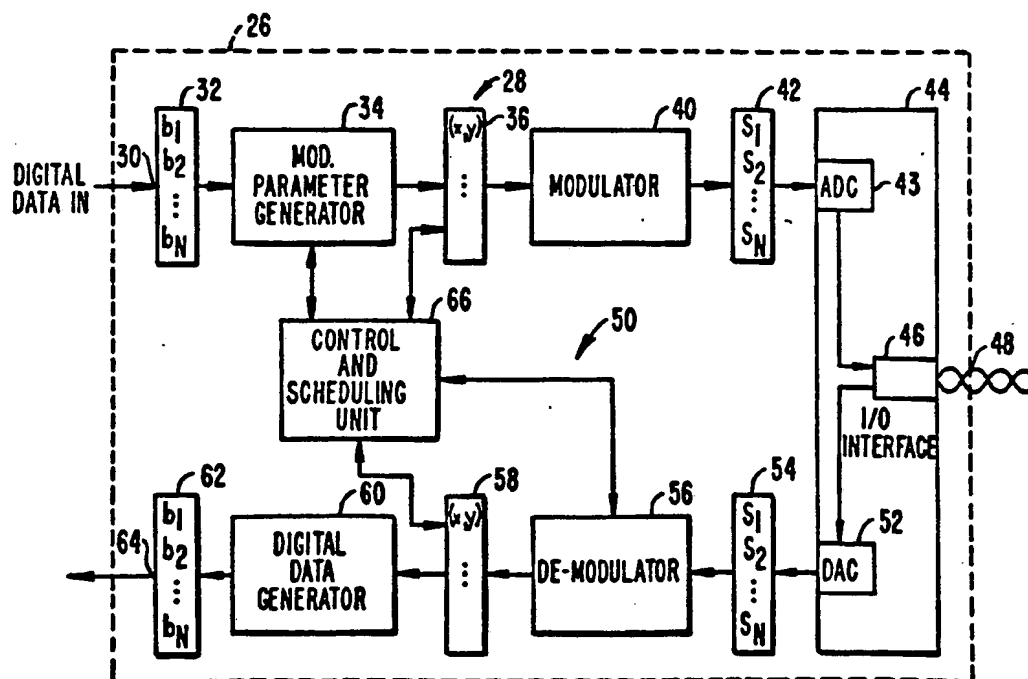

(57) Abstract

A high speed modem (26) that transmits and receives digital data on an ensemble of carrier frequencies spanning the usable band of a dial-up telephone line (48). The modem includes a system (30, 32, 34, 36, 40, 43, 44) for variably allocating data and power among the carriers to compensate for equivalent noise and to maximize the data rate. Additionally, systems for eliminating the need for an equalization network, for adaptively allocating control of a channel, and for tracking variations in line parameters are disclosed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GA	Gabon	MR	Mauritania
AU	Australia	GB	United Kingdom	MW	Malawi
BB	Barbados	HU	Hungary	NL	Netherlands
BE	Belgium	IT	Italy	NO	Norway
BG	Bulgaria	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali		
FR	France				

ENSEMBLE MODEM STRUCTURE FOR
IMPERFECT TRANSMISSION MEDIA

BACKGROUND OF THE INVENTION

5 1. Field of the Invention:

The invention relates generally to the field of data communications and, more particularly, to a high speed modem.

2. Description of the Prior Art:

10 Recently, specially designed telephone lines for the direct transmission of digital data have been introduced. However, the vast majority of telephone lines are designed to carry analog voice frequency (VF) signals. Modems are utilized to modulate VF carrier
15 signals to encode digital information on the VF carrier signals and to demodulate the signals to decode the digital information carried by the signal.

Existing VF telephone lines have several limitations that degrade the performance of modems and
20 limit the rate at which data can be transmitted below desired error rates. These limitations include the presence of frequency dependent noise on the VF telephone lines, a frequency dependent phase delay induced by the VF telephone lines, and frequency dependent signal loss.
25

Generally, the usable band of a VF telephone line is from slightly above zero to about four kHz. The power spectrum of the line noise is not uniformly distributed over frequency and is generally not determinative. Thus, there is no a priori method for determining the distribution of the noise spectrum over the
30 usable bandwidth of the VF line.

Additionally, a frequency-dependent propagation delay is induced by the VF telephone line. Thus,
35 for a complex multi-frequency signal, a phase delay

between the various components of the signal will be induced by the VF telephone line. Again, this phase delay is not determinative and must be measured for an individual VF telephone line at the specific time that transmission takes place.

Further, the signal loss over the VF telephone line varies with frequency. The equivalent noise is the noise spectrum component added to the signal loss component for each carrier frequency, where both components are measured in decibels (dB).

Generally, prior art modems compensate for equivalent line noise and signal loss by gear-shifting the data rate down to achieve a satisfactory error rate. For example, in U.S. patent 4,438,511, by Baran, a high speed modem designated SM9600 Super Modem manufactured by Gandalf Data, Inc., is described. In the presence of noise impairment, the SM9600 will "gear shift" or drop back its transmitted data rate to 4800 bps or 2400 bps. The system described in the Baran patent transmits data over 64 orthogonally modulated carriers. The Baran system compensates for the frequency dependent nature of the noise on the VF line by terminating transmission on carriers having the same frequency as the frequency of large noise components on the line. Thus, Baran gracefully degrades its throughput by ceasing to transmit on carrier frequencies at the highest points of the VF line noise spectrum. The Baran system essentially makes a go/no go decision for each carrier signal, depending on the distribution of the VF line noise spectrum. This application reflects a continuation of the effort initiated by Baran.

Most prior art systems compensate for frequency dependent phase delay induced by the VF line by an equalization system. The largest phase delay is induced in frequency components near the edges of the usable band. Accordingly, the frequency components near the center of the band are delayed to allow the

frequency components at the outside of the band to catch up. Equalization generally requires additional circuitry to accomplish the above-described delays.

5 A further problem associated with two way transmission over the VF telephone line is that interference between the outgoing and incoming signals is possible. Generally, separation and isolation between the two signals is achieved in one of three ways:

10 (a) Frequency multiplexing in which different frequencies are used for the different signals. This method is common in modem-based telecommunication systems.

15 (b) Time multiplexing, in which different time segments are used for the different signals. This method is often used in half-duplex systems in which a transmitter relinquishes a channel only after sending all the data it has. And,

20 (c) Code multiplexing, in which the signals are sent using orthogonal codes.

 All of the above-described systems divide the space available according to constant proportions fixed during the initial system design. These constant proportions, however, may not be suitable to actual traffic load problem presented to each modem. For
25 example, a clerk at a PC work station connected to a remote host computer may type ten or twenty characters and receive a full screen in return. In this case, constant proportions allocating the channel equally
30 between the send and receive modems would greatly overallocate the channel to the PC work station clerk. Accordingly, a modem that allocates channel capacity according to the needs of the actual traffic load situation would greatly increase the efficient
35 utilization of the channel capacity.

SUMMARY OF THE INVENTION

The present invention is a high-speed modem for use with dial-up VF telephone lines. The modem
5 utilizes a multicarrier modulation scheme and variably allocates data and power to the various carriers to maximize the overall data transmission rate. The allocation of power among the carriers is subject to the constraint that the total power allocated must not
10 exceed a specified limit.

In a preferred embodiment, the modem further includes a variable allocation system for sharing control of a communication link between two modems (A and B) according to actual user requirements.

15 Another aspect of the invention is a system for compensating for frequency dependent phase delay and preventing intersymbol interference that does not require an equalization network.

According to one aspect of the invention,
20 quadrature amplitude modulation (QAM) is utilized to encode data elements of varying complexity on each carrier. The equivalent noise component at each carrier frequency is measured over a communication link between two modems (A and B).

25 As is known in the art, if the bit error rate (BER) is to be maintained below a specified level, then the power required to transmit a data element of a given complexity on a given carrier frequency must be increased if the equivalent noise component at that
30 frequency increases. Equivalently, to increase data complexity, the signal to noise ratio, S/N , must be increased.

In one embodiment of the present invention, data and power are allocated to maximize the overall
35 data rate within external BER and total available power constraints. The power allocation system computes the marginal required power to increase the symbol rate on each carrier from n to $n + 1$ information units. The

system then allocates information units to the carrier that requires the least additional power to increase its symbol rate by one information unit. Because the
5 marginal powers are dependent on the values of the equivalent noise spectrum of the particular established transmission link, the allocation of power and data is specifically tailored to compensate for noise over this particular link.

10 According to another aspect of the invention, a first section of the symbol on each carrier is retransmitted to form a guard-time waveform of duration $T_E + T_{PH}$ where T_E is the duration of the symbol and T_{PH} is the duration of the first section. The magnitude of
15 T_{PH} is greater than or equal to the maximum estimated phase delay for any frequency component of the waveform. For example, if the symbol is represented by the time series, $x_0 \dots x_{n-1}$, transmitted in time T_E ; then the guardtime waveform is represented by the time
20 series, $x_0 \dots x_{n-1}$, $x_0 \dots x_{m-1}$, transmitted in time $T_E + T_{PH}$. The ratio that m bears to n is equal to the ratio that T_{PH} bears to T_E .

At the receiving modem, the time of arrival, T_0 , of the first frequency component of the guard-time
25 waveform is determined. A sampling period, of duration T_E , is initiated a time $T_0 + T_{PH}$.

Accordingly, the entire symbol on each carrier frequency is sampled and intersymbol interference is eliminated.

30 According to a still further aspect of the invention, allocation of control to the transmission link between modems A and B is accomplished by setting limits to the number of packets that each modem may transmit during one transmission cycle. A packet of
35 information comprises the data encoded on the ensemble of carriers comprising one waveform. Each modem is also constrained to transmit a minimum number of packets to maintain the communication link between the modems.

Thus, even if one modem has no data to transmit, the minimum packets maintain timing and other parameters are transmitted. On the other hand, if the volume of data for a modem is large, it is constrained to transmit only the maximum limited number of packets, N , before relinquishing control to the other modem.

In practice, if modem A has a small volume of data and modem B has a large volume of data, modem B will have control of the transmission link most of the time. If control is first allocated to modem A it will only transmit the minimal number, I , of packets. Thus A has control for only a short time. Control is then allocated to B which transmits N packets, where N may be very large. Control is again allocated to modem A which transmits I packets before returning control to B.

Thus, allocation of control is proportional to the ratio of I to N . If the transmission of the volume of data on modem A requires L packets, where L is between I and N , then the allocation is proportional to the ratio of L to N . Accordingly, allocation of the transmission link varies according to the actual needs of the user.

Additionally, the maximum number of packets, N , need not be the same for each modem, but may be varied to accommodate known disproportions in the data to be transmitted by A and B modems.

According to another aspect of the invention, signal loss and frequency offset are measured prior to data determination. A tracking system determines variations from the measured values and compensates for these deviations.

According to a further aspect of the invention, a system for determining a precise value of T_0 is included. This system utilizes two timing signals, at f_1 and f_2 , incorporated in a waveform transmitted from modem A at time T_A . The relative phase difference

between the first and second timing signals at time T_A is zero.

5 The waveform is received at modem B and a rough estimate, T_{EST} , of the time of reception is obtained by detecting energy at f_1 . The relative phase difference between the timing signals at time T_{EST} is utilized to obtain a precise timing reference, T_0 .

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 is a graph of the ensemble of carrier frequencies utilized in the present invention.

Fig. 2 is a graph of the constellation illustrating the QAM of each carrier.

15 Fig. 3 is a block diagram of an embodiment of the invention.

Fig. 4 is a flow chart illustrating the synchronization process of the present invention.

20 Fig. 5 is a series of graphs depicting the constellations for 0, 2, 4, 5, 6 bit data elements and exemplary signal to noise ratios and power levels for each constellation.

Fig. 6 is a graph illustrating the waterfilling algorithm.

25 Fig. 7 is a histogram illustrating the application of the waterfilling algorithm utilized in the present invention.

Fig. 8 is a graph depicting the effects of phase dependent frequency delay on frequency components in the ensemble.

30 Fig. 9 is a graph depicting the wave forms utilized in the present invention to prevent intersymbol interference.

Fig. 10 is a graph depicting the method of receiving the transmitted ensemble.

35 Fig. 11 is a schematic diagram depicting the modulation template.

Fig. 12 is a schematic diagram depicting the quadrants of one square in the modulation template.

Fig. 13 is a schematic diagram of a hardware embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is a modem that adaptively allocates power between various carrier frequencies in a frequency ensemble to compensate for frequency dependent line noise, eliminates the need for equalization circuitry to compensate for a frequency dependent phase delay, and provides a duplex mechanism that accounts for varying channel load conditions to allocate the channel between the send and receive modems. Additional features of the invention are described below.

A brief description of the frequency ensemble and modulation scheme utilized in the present invention is first presented with respect to Figs. 1 and 2 to facilitate the understanding of the invention. A specific embodiment of the invention is then described with reference to Fig. 3. Finally, the operation of various features of the invention are described with reference to Figs. 4 through 13.

Modulation and Ensemble Configuration

Referring now to Fig. 1, a diagrammatic representation is shown of the transmit ensemble 10 of the present invention. The ensemble includes 512 carrier frequencies 12 equally spaced across the available 4 kHz VF band. The present invention utilizes quadrature amplitude modulation (QAM) wherein phase independent sine and cosine signals at each carrier frequency are transmitted. The digital information transmitted at a given carrier frequency is encoded by amplitude modulating the independent sine and cosine signals at that frequency.

The QAM system transmits data at an overall bit rate, R_B . However, the transmission rate on each carrier, denoted the symbol or baud rate, R_S , is only a fraction of R_B . For example, if data were allocated
5 equally between two carriers then $R_S = R_B/2$.

In the preferred embodiment 0, 2, 4, 5 or 6 bit data elements are encoded on each carrier and the modulation of each carrier is changed every 136 msec.
10 A theoretical maximum, R_B , assuming a 6 bit R_S for each carrier, of 22,580 bit/sec (bps) results. A typical reliable R_S , assuming 4 bit R_S over 75% of the carriers, is equal to about 11,300 bps. This extremely high R_S is achieved with a bit error rate of less than
15 1 error/100,000 bits transmitted.

In Fig. 1, a plurality of vertical lines 14 separates each ensemble into time increments known hereafter as "epochs." The epoch is of duration T_E where the magnitude of T_E is determined as set forth
20 below.

The QAM system for encoding digital data onto the various carrier frequencies will now be described with reference to Fig. 2. In Fig. 2 a four bit "constellation" 20 for the n th carrier is depicted. A four
25 bit number may assume sixteen discrete values. Each point in the constellation represents a vector (x_n, y_n) with x_n being the amplitude of the sine signal and y_n being the amplitude of the cosine signal in the above-described QAM system. The subscript n indicates the
30 carrier being modulated. Accordingly, the four bit constellation requires four discrete y_n and four discrete x_n values. As described more fully below, increased power is required to increase the number of bits transmitted at a given carrier frequency due to
35 the equivalent noise component at that frequency. The receive modem, in the case of four bit transmission, must be able to discriminate between four possible values of the x_n and y_n amplitude coefficients. This

ability to discriminate is dependent on the signal to noise ratio for a given carrier frequency.

In a preferred embodiment, packet technology
5 is utilized to reduce the error rate. A packet includes the modulated epoch of carriers and error detection data. Each packet in error is retransmitted until correct. Alternatively, in systems where retransmission of data is undesirable, epochs with forward error correcting
10 codes may be utilized.

Block Diagram

Fig. 3 is a block diagram of an embodiment of the present invention. The description that follows is of an originate modem 26 coupled to an originate end of
15 a communication link formed over a public switched telephone line. It is understood that a communication system also includes an answer modem coupled to the answer end of the communication link. In the following discussion, parts in the answer modem corresponding to
20 identical or similar parts in the originate modem will be designated by the reference number of the originate modem primed.

Referring now to Fig. 3, an incoming data stream is received by a send system 28 of the modem 26
25 at data input 30. The data is stored as a sequence of data bits in a buffer memory 32. The output of buffer memory 32 is coupled to the input of a modulation parameter generator 34. The output of the modulation parameter generator 34 is coupled to a vector table
30 buffer memory 36 with the vector table buffer memory 36 also coupled to the input of a modulator 40. The output of the modulator 40 is coupled to a time sequence buffer 42 with the time sequence buffer 42 also coupled to the input of a digital-to-analog converter 43 in-
35 cluded in an analog I/O interface 44. The interface 44 couples the output of the modem to the public switched telephone lines 48.

A receive system 50 includes an analog-to-digital converter (ADC) 52 coupled to the public switched telephone line 48 and included in the interface 44. The
5 output from the ADC 52 is coupled to a receive time series buffer 54 which is also coupled to the input of a demodulator 56. The output of the demodulator 56 is coupled to a receive vector table buffer 58 which is also coupled to the input of a digital data generator
10 60. The digital data generator 60 has an output coupled to a receive data bit buffer 62 which is also coupled to an output terminal 64.

A control and scheduling unit 66 is coupled with the modulation parameter generator 34, the vector
15 table buffer 36, the demodulator 56, and the receive vector table buffer 58.

An overview of the functioning of the embodiment depicted in Fig. 3 will now be presented. Prior to the transmission of data, the originate modem 26, in
20 cooperation with the answer modem 26', measures the equivalent noise level at each carrier frequency, determines the number of bits per epoch to be transmitted on each carrier frequency, and allocates power to each carrier frequency as described more fully below.

25 The incoming data is received at input port 30 and formatted into a bit sequence stored in the input buffer 32.

The modulator 34 encodes a given number of bits into an (x_n, y_n) vector for each carrier frequency
30 utilizing the QAM system described above. For example, if it were determined that four bits were to be transmitted at frequency f_n then four bits from the bit stream would be converted to one of the sixteen points in the four bit constellation of Fig. 2. Each of these
35 constellation points corresponds to one of sixteen possible combinations of four bits. The amplitudes of the sine and cosine signals for frequency n then corresponds to the point in the constellation encoding the four bits

of the bit sequence. The (x_n, y_n) vectors are then stored in the vector buffer table 36. The modulator receives the table of (x_n, y_n) vectors for the carriers in the ensemble and generates a digitally encoded time series representing a wave form comprising the ensemble of QAM carrier frequencies.

In a preferred embodiment the modulator 40 includes a fast Fourier transform (FFT) and performs an inverse FFT operation utilizing the (x, y) vectors as the FFT coefficients. The vector table includes 1,024 independent points representing the 1,024 FFT points of the 512 frequency constellation. The inverse FFT operation generates 1,024 points in a time series representing the QAM ensemble. The 1,024 elements of this digitally encoded time series are stored in the digital time series buffer 42. The digital time sequence is converted to an analog wave form by the analog to digital converter 43 and the interface 46 conditions the signal for transmission over the public switched telephone lines 48.

Turning now to the receive system 50, the received analog waveform from the public switched telephone lines 48 is conditioned by the interface 46 and directed to the analog to digital converter 52. The analog to digital converter 52 converts the analog waveform to a digital 1,024 entry time series table which is stored in the receive time series buffer 54. The demodulator 56 converts the 1,024 entry time series table into a 512 entry (x_n, y_n) vector table stored in the receive vector table buffer 58. This conversion is accomplished by performing an FFT on the time series. Note that information regarding the number of bits encoded onto each frequency carrier has been previously stored in the demodulator and digital data generator 60 so that the (x, y) table stored in the receive vector table buffer 58 may be transformed to an output data bit sequence by the digital data generator 60. For

example, if the (x_n, y_n) vector represents a four bit sequence then this vector would be converted to a four bit sequence and stored in the receive data bit buffer
5 62 by the digital data generator 60. The receive data bit sequence is then directed to the output 64 as an output data stream.

A full description of the FFT techniques utilized is described in a book by Rabiner et al., entitled
10 Theory and Applications of Digital Signal Processing, Prentice-Hall, Inc., N.J., 1975. However, the FFT modulation technique described above is not an integral part of the present invention. Alternatively, modulation could be accomplished by direct multiplication of the
15 carrier tones as described in the above-referenced Baran patent, which is hereby incorporated by reference, at col. 10, lines 13-70, and col. 11, lines 1-30. Additionally, the demodulation system described in Baran at col. 12, lines 35-70, col. 13, lines 1-70, and col. 14, lines
20 1-13 could be substituted.

The control and scheduling unit 66 maintains overall supervision of the sequence of operations and controls input and output functions.

Determination of Equivalent Noise

25 As described above, the information content of the data element encoded on each frequency carrier and the power allocated to that frequency carrier depends on the magnitude of the channel noise component at that carrier frequency. The equivalent transmitted
30 noise component at frequency f_n , $N(f_n)$, is the measured (received) noise power at frequency f_n multiplied by the measured signal loss at frequency f_n . The equivalent noise varies from line to line and also varies on a given line at different times. Accordingly, in the
35 present system, $N(f)$ is measured immediately prior to data transmission.

The steps of a synchronization technique utilized in the present system to measure $N(f)$ and

establish a transmission link between answer and originate modems 26 and 26' are illustrated in Fig. 4. Referring now to Fig. 4, in step 1 the originate modem
5 dials the number of the answer modem and the answer modem goes off hook. In step 2 the answer modem transmits an epoch of two frequencies at the following power levels:

- 10 (a) 1437.5 Hz. at -3 dBR; and
- (b) 1687.5 Hz at -3 dBR.

The power is measured relative to a reference, R, where, in a preferred embodiment, 0dBR = -9dBm, m being a millivolt. These tones are used to determine timing and frequency offset as detailed subsequently.

- 15 The answer modem then transmits an answer comb containing all 512 frequencies at -27dBR. The originate modem receives the answer comb and performs an FFT on the comb. Since the power levels of the 512 frequencies were set at specified values, the control and scheduling unit
20 66 answer modem 26 compares the (x_n, y_n) values for each frequency of the received code and compares those values to a table of (x_n, y_n) values representing the power levels of the transmitted answer code. This comparison yields the signal loss at each frequency due to the
25 transmission over the VF telephone lines.

- During step 3 both the originate and answer modems 26 and 26' accumulate noise data present on the line in the absence of any transmission by either modem. Both modems then perform an FFT on the accumulated noise signals to determine the measured
30 (received) noise spectrum component values at each carrier frequency. Several epochs of noise may be averaged to refine the measurement.

- In step 4 the originate modem transmits an
35 epoch of two frequencies followed by an originate comb of 512 frequencies with the same power levels described above for step 2. The answer modem receives the epoch and the originate comb and calculates the timing, fre-

quency offset and signal loss values at each carrier frequency as described above for the originate modem in step 2. At this point the originate modem 26 has accumulated noise and signal loss data for transmission in the answer originate direction while the answer modem has accumulated the same data relating to transmission in the originate answer direction. Each modem requires data relating to transmission loss and receive noise in both the originate-answer and answer-originate directions. Therefore, this data is exchanged between the two modems according to the remaining steps of the synchronization process.

In step 5 the originate modem generates and transmits a first phase encoded signal indicating which carrier frequencies will support two bit transmission at standard power levels in the answer-originate direction. Each component that will support two bits in the answer-originate direction at a standard power level is generated as a -28 dBR signal with 180° relative phase. Each component that will not support two bit transmission in the answer-originate direction at the standard power level is coded as a -28 dBR, 0° relative phase signal. The answer modem receives this signal and determines which frequency carriers will support two bit transmission in the answer-originate direction.

In step 6 the answer modem generates and transmits a second phase encoded signal indicating which carrier frequencies will support two bit transmission in both the originate-answer and answer-originate directions. The generation of this signal is possible because the answer modem has accumulated noise and signal loss data in the originate-answer direction and has received the same data for the answer-originate direction in the signal generated by the originate modem in step 5. In the signal generated by the originate modem, each frequency component that will support two bits in both directions is coded with 180° relative

phase and all other components are coded with 0° relative phase.

5 A transmission link now exists between the two modems. In general, 300 to 400 frequency components will support two bit transmission at a standard power level, thereby establishing about a 600 bit/epoch rate between the two modems. In step 7 the originate modem sends data on the number of bits (0 to 15) and
10 the power levels (0 to 63dB) that can be supported on each frequency in the answer-originate direction in ensemble packets formed over this existing data link. Accordingly, both the originate and answer modem now have the data relating to transmission in the answer-originate direction. The steps for calculating the
15 number of bits and power levels that can be supported on each frequency component will be described below.

In step 8 the answer modem sends data on the number of bits and power levels that can be supported
20 on each frequency in the originate-answer direction utilizing the existing data link. Thus, both modems are apprised of the number of bits and power levels to be supported on each frequency component in both the answer-originate and originate-answer directions.

25 The above description of the determination of the equivalent noise level component at each carrier frequency sets forth the required steps in a given sequence. However, the sequence of steps is not critical and many of the steps may be done simultaneously or
30 in different order, for example, the performance of the FFT on the originate code and the accumulation of noise data may be done simultaneously. A precise timing reference is also calculated during the synchronization process. The calculation of this timing reference will
35 be described more fully below after the description of the method for calculating the number of bits and power levels allocated to each frequency component.

It is a common VF telephone line impairment that a frequency offset, of up to 7 Hz, exists between transmitted and received signals. This offset must be
5 corrected for the FFT to function reliably. In a preferred embodiment, this correction is achieved by performing a single sideband modulation of the quadrature tones at the offset frequency by the true and Hilbert images of received signal. Synchronization and
10 tracking algorithms generate estimates of the frequency offset necessary.

Power and Code Complexity Allocation

The information encoded on each carrier frequency signal is decoded at the receiver channel by the
15 demodulator 56. Channel noise distorts the transmitted signal and degrades the accuracy of the demodulation process. The transmission of a data element having a specified complexity, e.g., B_0 bits at a specified frequency, f_0 , over a VF telephone line characterized by
20 an equivalent noise level component, N_0 , will now be analyzed. Generally, external system requirements determine a maximum bit error rate (BER) that can be tolerated. For the transmission of b_0 bits at noise level N_0 and frequency f_0 , the signal to noise ratio
25 must exceed E_b/N_0 where E_b is the signal power per bit to maintain the BER below a given BER, $(BER)_0$.

Fig. 5 depicts the QAM constellations for signals of various complexities B . An exemplary signal to noise ratio, E_b/N_0 , for each constellation and the
30 power required to transmit the number of bits in the constellation without exceeding $(BER)_0$ is depicted alongside each constellation graph.

A modem operates under the constraint that the total available power placed on the public switched
35 telephone lines may not exceed a value, P_0 , set by the telephone companies and government agencies. Thus, signal power may not be increased indefinitely to compensate for line noise. Accordingly, as noise

increases, the complexity of the signals transmitted must be decreased to maintain the required BER.

Most existing modems arbitrarily gear shift the signal complexity down as line noise power increases. For example, one prior art modem reduces the transmitted data rate from a maximum of 9,600 bps to steps of 7,200 bps, 4,800 bps, 2,400 bps, 1,200 bps, and so on until the bit error rate is reduced below a specified maximum. Accordingly, the signal rate is decreased in large steps to compensate for noise. In the Baran patent, the method for reducing the transmission rate takes into account the frequency dependent nature of the noise spectrum. There, each channel carries a preset number of bits at a specified power level. The noise component at each frequency is measured and a decision is made whether to transmit at each carrier frequency. Thus, in Baran, the data rate reduction scheme compensates for the actual distribution of the noise over the available bandwidth.

In the present invention, the complexity of the signal on each frequency carrier and the amount of the available power allocated to each frequency carrier is varied in response to the frequency dependence of the line noise spectrum.

The present system for assigning various code complexities and power levels to the frequency component signals in the ensemble is based on the waterfilling algorithm. The waterfilling algorithm is an information theoretic way of assigning power to a channel to maximize the flow of information across the channel. The channel is of the type characterized by an uneven noise distribution and the transmitter is subject to a power constraint. Fig. 6 provides a visualization of the waterfilling algorithm. Referring now to Fig. 6, power is measured along the vertical axis and frequency is measured along the horizontal axis. The equivalent noise spectrum is represented by the solid line 70 and

the available power is represented by the area of the cross hatched region 72. The name waterfilling comes from the analogy of the equivalent noise function to a series of valleys in a mountain filled with a volume of water representing the assigned power. The water fills the valleys and assumes a level surface. A theoretical description of the waterfilling algorithm is given in the book by Gallagher, entitled Information Theory And Reliable Communication; J. Wiley and Sons, New York, 1968, p. 387.

It must be emphasized that the waterfilling theorem relates to maximizing the theoretical capacity of a channel where the capacity is defined as the maximum of all data rates achievable using different codes, all of which are error correcting, and where the best tend to be of infinite length.

The method utilizing the present invention does not maximize the capacity of the channel. Instead, the method maximizes the amount of information transmitted utilizing the QAM ensemble described above with respect to Fig. 1 and subject to an available power restriction.

An implementation of the waterfilling concept is to allocate an increment of available power to the carrier having the lowest equivalent noise floor until the allocated power level reaches the equivalent noise level of the second lowest carrier. This allocation requires a scan through the 512 frequencies.

Incremental power is then allocated between the lowest two carriers until the equivalent noise level of the third lowest channel is reached. This allocation level requires many scans through the frequency table and is computationally complex.

The power allocation method used in a preferred embodiment of the present invention is as follows:

(1) Calculate the system noise at the transmitter by measuring the equivalent noise at the receiver and multiplying by transmission loss. This process for measuring these quantities was described above with respect to synchronization and Fig. 4. The system noise components are calculated for each carrier frequency.

(2) For each carrier frequency, calculate the power levels required to transmit data elements of varying complexity (in the present case, 0, 2, 4, 5, 6, and 8 bits). This is accomplished by multiplying the equivalent noise by the signal to noise ratios necessary for transmission of the various data elements with a required BER, for example one error per 100,000 bits. The overall BER is the sum of the signal error rates of each modulated carrier. These signal to noise ratios are available from standard references, and are well-known in the art.

(3) From the calculated required transmission power levels, the marginal required power levels to increase data element complexity are determined. These marginal required power levels are the difference in transmission power divided by the quantitative difference in complexity of the data elements closest in complexity.

(4) For each channel generate a two column table of marginal required power levels and quantitative differences where the units are typically expressed as Watts and bits, respectively.

(5) Construct a histogram by organizing the table of step 4 according to increasing marginal power.

(6) Assign the available transmitter power sequentially over the increasing marginal powers until available power is exhausted.

The power allocation method may be better understood through a simple example. The numbers pre-

sented in the example are not intended to represent parameters encountered in an operating system.

Table 1 sets out the power requirement, P, to transmit a data element of a selected number of bits, N_1 , for two carriers A and B at frequencies f_A and f_B .

TABLE 1
Carrier A

	N_1	$N_2 - N_1$	P	MP(N_1 to N_2)
10	0	-	0	-
	2	2	4	MP(0to2)=2/bit
	4	2	12	MP(2to4)=4/bit
	5	1	19	MP(4to5)=7/bit
	6	1	29	MP(5to6)=10/bit
15				
			<u>Carrier B</u>	
	N_1	$N_2 - N_1$	P	MP(N_1 to N_2)
	0	-	0	-
	2	2	6	MP(0to2)=3/bit
	4	2	18	MP(2to4)=6/bit
20	5	1	29	MP(4to5)=11/bit
	6	1	44	MP(5to6)=15/bit

The marginal power to increase the complexity from a first number of bits, N_1 , to a second number of bits, N_2 , is defined by the relationship:

$$25 \quad MP(N_1 \text{ to } N_2) = \frac{P_2 - P_1}{N_2 - N_1}$$

where P_2 and P_1 are the powers required to transmit data elements of complexity N_2 and N_1 . $N_2 - N_1$ is quantitative difference in the complexity of the data elements. It is understood the BER is constrained to remain below a preset limit.

The marginal powers for f_A are less than for f_B because the equivalent noise at f_B , $N(f_B)$, is greater than the equivalent noise at f_A , $N(f_A)$.

5 The implementation of the allocation scheme for carriers A and B will now be described. Assume that a total number of bits, N_T , are encoded on the ensemble but that no bits have been assigned to carriers A or B. For example, $N(f_A)$ and $N(f_B)$ might be greater than the
10 powers of those carriers already carrying the data.

In this example, the system is to allocate ten remaining available power units between carriers A and B to increase the overall data element complexity by the maximum amount.

15 To increase N_T by two bits requires that four units of power be allocated if channel A is utilized and that six units of power be allocated in channel B is utilized. This follows because for both channels $N_1 = 0$ and $N_2 = 2$ and $MP(0 \text{ to } 2) = 2/\text{bit}$ for channel A
20 and $MP(0 \text{ to } 2) = 3/\text{bit}$ for channel B. Therefore, the system allocates four units of power to carrier A, encodes a two bit data element on carrier A, increases the overall signal complexity from N_T to $N_T + 2$, and has six remaining available power units.

25 The next increase of two bits requires six power units because $MP(2 \text{ to } 4) = 4/\text{bit}$ for carrier A and $MP(0 \text{ to } 2) = 3/\text{bit}$ for channel B. Therefore, the system allocates six units of power to carrier B, encodes a two bit data element on carrier B, increases the over-
30 all signal complexity from $N_T + 2$ to $N_T + 4$ bits, and has no remaining available power units.

As is now clear, the system "shops" among the various carrier frequencies for the lowest power cost to increase the complexity of the overall ensemble data
35 element.

The allocation system is extended to the full 512 carrier ensemble by first generating the tables of

Table 1 for each carrier during a first pass through the frequencies.

A histogram organizing the calculated
5 marginal required power levels for all the carriers according to increasing power is then constructed. Fig. 7 is a depiction of an exemplary histogram constructed according to the present method.

In Fig. 7 the entire table of marginal powers
10 is not displayed. Instead, the histogram is constructed having a range of 64dB with counts spaced in 0.5dB steps. The quantitative differences between the steps are utilized as counts. Although this approach results in a slight round-off error, a
15 significant reduction in task length is achieved. The method used to construct the histogram is not critical to practicing the invention.

Each count of the histogram has an integer entry representing the number of carriers having a
20 marginal power value equal to the power value at the count. The histogram is scanned from the lowest power level. The integer entry at each count is multiplied by the number of counts and subtracted from the available power. The scan continues until available power
25 is exhausted.

When the scan is completed it has been determined that all marginal power values below a given level, $MP(max)$, are acceptable for power and data allocation. Additionally, if available power is exhausted
30 partially through marginal power level, $MP(max)$, then k additional carriers will be allocated power equal to $MP(max + 1)$.

The system then scans through the ensemble again to allocate power and data to the various carriers.
35 The amount of power allocated to each carrier is the sum of marginal power values for that carrier less than or equal to $MP(max)$. Additionally, an amount of power equal to $MP(max + 1)$ will be allocated if the

k MP(max + 1) values have not been previously allocated.

Timing and Phase Delay Compensation

5 The reconstruction of (x,y) vector table by the receive system requires 1024 time samples of the received waveform. The bandwidth is about 4kHz so that Nyquist sampling rate about 8000/sec and the time sample offset between samples is 125 microseconds. The total
10 sampling time is thus 128 msec. Similarly, the transmit FFT generates a time series having 1024 entries and the symbol time is 128 msec.

 The sampling process requires a timing reference to initiate the sampling. This timing reference
15 is established during synchronization by the following method:

 During the synchronization steps defined with reference to Fig. 4, the originate modem detects energy at the 1437.5 Hz frequency component (the first timing
20 signal) in the answer comb at time T_{EST} . This time is a rough measure of the precise time that the first timing frequency component arrives at the receiver and is generally accurate to about 2 msec.

 This rough measure is refined by the following
25 steps. The first timing signal and a second timing signal (at 1687.5 Hz) are transmitted with zero relative phase at the epoch mark.

 The originate modem compares the phases of the first and second timing signals at time T_{EST} . The
30 250 Hz frequency difference between the first and second timing signals results in an 11° phase shift between the two signals for each 125 microsecond time sample offset. The first and second timing signals have low relative phase distortion (less than 250
35 microseconds) due to their location near the center of the band. Accordingly, by comparing the phases of the two timing samples and correcting T_{EST} by the number of

time sampling offsets indicated by the phase difference, a precise timing reference, T_0 , can be determined.

5 A further difficulty relating to timing the sampling process relates to frequency dependent phase delay induced by the VF line. This phase delay typically is on the order of 2 msec, or more, for VF telephone lines. Further, this phase delay is significantly worse near the edges of the 4kHz usable band.

10 Fig. 8 depicts distribution of the frequency carriers of the ensemble after undergoing frequency dependent phase delay. Referring to Fig. 8, three signals 90, 92, and 94 at frequencies f_0 , f_{256} , and f_{512} are depicted. Two symbols, x_i and y_i , of length T_s are transmitted at each frequency. Note that the
15 duration of each symbol is not changed. However, the leading edge of the signals near the edge of the band 92 and 94 are delayed relative to those signals near the center of the band 94.

20 Additionally, for two sequentially transmitted epochs x_i and y_i the trailing section of the first symbol x_i on signals 92 and 96, near the outer edge of the band will overlap the leading edge of the second symbol y_i on the signal 94 near the center of the band.
25 This overlap results in intersymbol interference.

If the sampling interval is framed to sample a given time interval, T_s , then complete samples of every carrier in the ensemble will not be obtained and signals from other epochs will also be sampled.

30 Existing systems utilize phase correction (equalization) networks to correct for phase distortion and to prevent intersymbol interference.

The present invention utilizes a unique guard-time format to eliminate the need for an equali-
35 zation network. This format is illustrated in Fig. 9.

Referring now to Fig. 9, first, second, and third transmitted symbols, represented by time series x_i , y_i , and z_i , respectively, are depicted. The wave-

forms depicted in Fig. 3 are modulated on one of the carriers at frequency f . In this example a symbol time, T_S , of 128 msec. and a maximum phase delay, T_{PH} , of 8 msec are assumed. A guard-time waveform is formed by repeating the first 8 msec. of the symbol. The guard-time waveform defines an epoch of 136 msec. For example, in the first waveform 110, (X_i) , the time series of the symbol, $X_0 - X_{1023}$, is first transmitted, then the first 8 msec. of the symbol, $X_0 - X_{63}$, are repeated.

The sampling of the epoch is aligned with the last 128 msec. of the guard-time waveform (relative to the beginning of the guard-time epoch defined by those frequency components which arrive first).

This detection process is illustrated in Fig. 10. In Fig. 10 first and second guard-time waveforms 110 and 112 at f_1 , near the center of the band, and f_2 , near the edge of the band, are depicted. The frequency component at f_1 is the component of the ensemble that arrives first at the receiver and the component at f_2 arrives last. In Fig. 10 the second waveform 112, at f_2 , arrives at the receiver at $T_0 + T_{PH}$, which is 8 msec. after the time, T_0 , that the first waveform 110, at f_1 , arrives at the receiver. The sampling period of 128 msec. is initiated at the time $T_0 + T_{PH}$. Thus, the entire symbol on f_2 , $X_0 - X_{1023}$, is sampled. The entire symbol at f_1 is also sampled because the initial 8 msec. of that symbol has been retransmitted.

Also, intersymbol interference has been eliminated. The arrival of the second symbol, (y_i) , at f_1 has been delayed 8 msec. by the retransmission of the first 8 msec. of (x_i) . Thus, the leading edge of the second symbol at f_1 , does not overlap the trailing edge of the first symbol at f_2 .

The 8 msec. guardtime reduces the usable time-bandwidth product of the system by only about 6%. This

small decrease is due to the very long duration of each symbol relative to the necessary guardtime.

Tracking

5 In practice, for a given carrier, the magnitudes of the (x,y) vectors extracted during the demodulation process do not fall exactly at the constellation points but are distributed over a range about each point due to noise and other factors.

10 Accordingly, the signal is decoded utilizing a modulation template as depicted in Fig. 11.

 Referring now to Fig. 11, the template is formed by a grid of squares 113 with the constellation points 114 at the centers of the squares 113.

15 In Fig. 11, the vector $W = (x_n, y_n)$ represents the demodulated amplitudes of the sine and cosine signals at f_n . W is in the square 113 having the constellation point (3,3) centered therein. Accordingly, W is decoded as (3,3).

20 The present invention includes a system for tracking to determine changes in transmission loss, frequency offset, and timing from the values determined during synchronization.

 This tracking system utilizes the position of
25 the received vectors in the squares of the demodulation template of Fig. 11. In Fig. 12, a single square is divided into four quadrants upper left, lower right, upper right, lower right, 115, 116, 117, and 118 characterized as too fast, too slow, too big, and too little,
30 respectively. If counts in all four quadrants over time by frequency or over frequency at one time are equal or nearly equal then the system is in alignment. That is, if noise is the only impairment, then the direction of error for the decoded vector, W, should be random.

35 However, if transmission loss changes by even 0.1dB the number of too small counts will vary significantly from the number of too large counts. Similarly, a large difference between the number of too fast and

too slow counts indicates a phase rotation caused by a change in the offset frequency. Thus, the differences between the too fast, too slow, and too big, too small
5 counts is an error characteristic that tracks variations in signal loss and offset frequency.

The present invention utilizes this error characteristic to adjust the signal loss and frequency offset determined during synchronization. For each
10 frequency an adjustment of $\pm .1\text{dB}$ or $\pm 1.0^\circ$ is made depending on the error characteristic. Other divisions of the decoding region into distinct or overlapping sub-regions characterized as too fast, too slow, too big, and too little are preferred in some embodiments.

15 Additionally, the phase of the timing signals is tracked to allow corrections of T_0 .

Allocation of Channel Control

The present invention further includes a unique system for allocating control of an established
20 communication link between the originate and answer modems (hereinafter designated A and B, respectively). Each waveform comprising the encoded ensemble of frequencies forms a packet of information.

Control of the transmission link is first
25 allocated to modem A. Modem A then determines the volume of data in its input buffer and transmits between I (a minimum) and N (a previously determined maximum) packets of data as appropriate. The predetermined number N serves as a limit and the end number of
30 transmitted packets may be significantly less than required to empty the input buffer. On the other hand, if modem A has little or no data in its input buffer it will still transmit I packets of information to maintain communication with modem B. For example, the I packets
35 may comprise the originate or answer comb of frequencies defined above with respect to Fig. 4 and the synchronization process.

Control of the communication link is then allocated to modem B which repeats the actions of modem A. Of course, if modem B transmits the minimum number, I, of packets it is confirming to modem A the vitality of modem B.

There is no need for the limits N on the two modems to be the same, or to restrict them from being adaptable under modem control to obtain rapid character echo or other user oriented goals.

Hardware Implementation

Fig. 13 is a block diagram of a hardware embodiment of the invention. Referring now to Fig. 13, an electronic digital processor 120, an analog I/O interface 44, and a digital I/O interface 122 are coupled to a common data bus 124. The analog I/O interface 44 interfaces the public switched telephone line 48 with the common data bus 124 and the digital interface 122 interfaces digital terminal equipment 126 with the common data bus 124.

The following components are utilized in a preferred embodiment of the invention. The analog I/O interface 44 is a high performance 12 bit coder-decoder (codec) and telephone line interface. The interface has access to RAM 132 and is controlled by supervisory micro-processor 128. The codec is a single chip combination of an analog to digital converter, a digital to analog converter, and several band pass filters.

The digital I/O interface 122 is a standard RS-232 serial interface to a standard twenty-five pin RS-232 type connector or a parallel interface to a personal computer bus.

The electronic digital processor 120, includes a supervisory processor 128, a general purpose mathematical processor 130, a 32K by 16 bit shared RAM subsystem 132, and a read only memory (ROM) unit 133, coupled to an address bus 135.

The supervisory microprocessor 128 is a 68000 data processor subsystem including a 10MHz 68000 processor and the 68000 program memory. The 32K by 16
5 bit program memory consists of several low power, high density, ROM chips included in the ROM unit 133.

The mathematical processor 130 is a 320 digital signal microprocessor system (DSP) including a 20MHz 320 processor, the 320 program memory, and an
10 interface to the shared RAM system. Two high speed ROM chips, included in ROM unit 133, comprise the 8192 x 16 bit program memory.

The 320 system program memory includes programs for performing the modulation table look-up, FFT, demodulation, and other operations described above.
15 The 68000 processor handles digital data streams at the input and output, performs tasking to and supervision of the 320 signal processor and associated analog I/O, and performs self and system test as appropriate.

20 The invention has been explained with respect to specific embodiments. Other embodiments will now be apparent to those of ordinary skill in the art.

In particular, the ensemble of carrier frequencies need not be limited as above-described. The
25 number of carriers may be any power of 2, e.g. 1024, or some arbitrary number. Additionally, the frequencies need not be evenly spaced over the entire VF band. Further, the QAM scheme is not critical to practicing the invention. For example, AM could be utilized
30 although the data rate, R_B , would be reduced.

Still further, the modulation template need not be comprised of squares. Arbitrarily shaped regions surrounding the constellation points may be defined. The tracking system was described where the
35 squares in the modulation template were divided into four quadrants. However, a given parameter may be tracked by tracking the difference in the number of

counts in arbitrary regions defined about a constellation point.

Still further, a hardware embodiment
5 including a supervisory microprocessor and a general purpose mathematical processor has been described. However, different combinations of IC chips may be utilized. For example, a dedicated FFT chip could be
10 utilized to perform modulation and demodulation operations.

Still further, the information units utilized in the above description were bits. However, the invention is not limited to binary system.

Accordingly, it is therefore intended that
15 the invention can be limited except as indicated by the appended claims.

WHAT IS CLAIMED IS:

1. In a high speed modem, for transmitting data over a telephone line, of the type that encodes data elements on an ensemble of carrier frequencies, a method for allocating data and power to the carrier frequencies, said method comprising the steps of:
 - determining the equivalent noise component for every carrier frequency in the ensemble;
 - determining the marginal power requirement to increase the complexity of the data element on each carrier from n information units to $n + 1$ information units, n being an integer between 0 and N ;
 - ordering the marginal powers of all the carriers in the ensemble in order of increasing power;
 - assigning available power to the ordered marginal powers in order of increasing power;
 - determining the value, $MP(max)$ at which point the available power is exhausted; and
 - allocating power and data to each carrier frequency where the power allocated is equal to the sum of all the marginal powers less than or equal to $MP(max)$ for that carrier and the number of data units allocated is equal to the number of marginal powers for that carrier less than or equal to $MP(max)$.
2. The invention of claim 1 where said step of ordering comprises the steps of:
 - providing a table of arbitrary marginal power levels; and
 - rounding the value of each determined marginal power level to one of the values of the table of arbitrary marginal power levels to decrease computational complexity.

3. The invention of claim 2 wherein the step of determining equivalent noise comprises the steps of:

- 5 providing an A and a B modem interconnected by a telephone line;
 establishing a communication link between said A and B modems;
 accumulating line noise data during a no transmission time interval at said A and B modems;
10 transmitting at least a first ensemble of frequency carriers from said A modem to said B modem, where the amplitude of each carrier has a predetermined value;
15 receiving said first ensemble at said B modem; measuring the amplitude of each carrier received at said B modem;
 comparing the measured amplitudes at said B modem with said predetermined amplitudes to determine
20 signal loss, in dB, at each carrier frequency;
 determining the value of the component, in dB, at each carrier frequency of the accumulated noise; and
 adding the signal loss at each carrier frequency to the noise component at each carrier frequency
25 to determine equivalent noise.

4. A high speed modem of the type for transmitting a signal on a VF telephone line, comprising:

- means for receiving an input digital data
30 stream and for storing said input digital data;
 means for generating a modulated ensemble of carriers to encode said input digital data, where each carrier has data elements of variable complexity encoded thereon;
35 means for measuring the signal loss and noise loss of the VF telephone line for each carrier; and

means for varying the complexity of the data element encoded on each carrier and the amount of power allocated to each carrier to compensate for the measured
5 signal loss and noise level.

5. A high speed modem of the type that encodes data elements on an ensemble of carriers of different frequency, said modem comprising:

- 10 a digital electronic processor;
- a digital electronic memory;
- bus means for coupling said processor and said memory;
- means, associated with said digital electronic processor, for
- 15 determining the equivalent noise component for every carrier frequency in the ensemble;
- determining the marginal power requirements to increase the complexity of the data element on each carrier from n information units to $n + 1$ information
- 20 units, n being an integer between 0 and N ;
- ordering the marginal powers of all the carriers in the ensemble in order of increasing power;
- assigning available power to the ordered marginal powers in order of increasing power;
- 25 determining the value, $MP(max)$ at which point the available power is exhausted; and
- assigning power and data to each carrier frequency where the power assigned is equal to the sum of all the marginal powers less than or equal to $MP(max)$
- 30 for that carrier and the number of data units is equal to the number of marginal powers for that carrier less than or equal to $MP(max)$.

6. In a high speed modem, for transmitting data in the form of a QAM ensemble of carrier frequencies on a VF telephone line, of the type that measures
35 the magnitude of a system parameter prior to

transmission, a method for tracking deviations in the magnitude of the system parameter during the receipt of data, said method comprising the steps of:

- 5 generating QAM constellations for a plurality of carrier frequencies;
 constructing a demodulation template for one of said plurality of carrier frequencies comprising a plurality of first regions with one of the points of
10 said constellation positioned within each of said first regions;
 forming a set of tracking regions where each first region has a first and second tracking region disposed therein;
- 15 demodulating said ensemble of carriers to obtain the demodulation points positioned in said set of first and second tracking regions;
 counting the number of points disposed in said set of first tracking regions and the number of
20 points disposed in said set of second tracking regions;
 determining the difference in the number of counts disposed in said set of first tracking regions and disposed in said tracking regions to construct an error characteristic; and
- 25 utilizing said error characteristic to adjust the magnitude of said signal parameter during the receipt of data.

7. The invention of claim 6 wherein said step of constructing a demodulation template comprises
30 the step of:

 constraining said first regions to be in the shape of squares having said constellation points centered therein.

8. The invention of claim 7 wherein said
35 step of forming said tracking regions comprises the step of:

dividing said squares into quadrants; and
selecting said tracking regions to be symmetrically disposed quadrants.

- 5 9. In a communication system of the type including two modems (A and B) coupled by a transmission link, each modem having an input buffer for storing data to be transmitted, a method for allocating control of the transmission link between modem A and B comprising the steps of:
- 10 allocating control of the transmission link to modem A;
- determining the volume of data stored in the input buffer of modem A;
- 15 determining the number, K , of packets of data required to transmit the volume of data stored in the input buffer of modem A;
- transmitting L packets of data from modem A to modem B where L is equal to I_A if K is less than I_A , where L is equal to K if K is greater than or equal to I_A , and where L is equal to N_A if K is greater than N_A so that the minimum number of packets transmitted is I_A and the maximum is N_A ;
- 20 allocating control of the transmission link to modem B;
- 25 determining the volume of data in the input buffer of modem B;
- determining the number, J , of packets of data required to transmit the volume of data stored in the input buffer of modem B;
- 30 transmitting M packets of data from modem B to modem A where M is equal to I_B if J is less than I_B , where M is equal to J if J is greater than or equal to I_B , and where L is equal to N_B if J is greater than N_B so that the minimum number of packets transmitted is I_B and the maximum is N_B ;
- 35

where allocation of control between modem A and B is dependent on the volume of data stored in the input buffers of modems A and B.

- 5 10. In a high speed modem, for transmitting data over a telephone line, of the type that encodes data elements on an ensemble of carrier frequencies, a system for allocating data and power to the carrier frequencies, said system comprising:
- 10 means for determining the equivalent noise component for every carrier frequency in the ensemble;
- means for determining the marginal power requirement to increase the complexity of the data element on each carrier from n information units to $n + 1$
- 15 information units, n being an integer between 0 and N ;
- means for ordering the marginal powers of all the carriers in the ensemble in order of increasing power;
- means for assigning available power to the
- 20 ordered marginal powers in order of increasing power;
- means for determining the value, $MP(max)$ at which point the available power is exhausted; and
- means allocating power and data to each carrier frequency where the power allocated is equal to
- 25 the sum of all the marginal powers less than or equal to $MP(max)$ for that carrier and the number of data units allocated is equal to the number of marginal powers for that carrier less than or equal to $MP(max)$.
11. The invention of claim 10 where said
- 30 means for ordering comprises:
- means for providing a table of arbitrary marginal power levels; and
- means for rounding the value of each determined marginal power level to one of the values of the table
- 35 of arbitrary marginal power levels to decrease computational complexity.

12. The invention of claim 11 wherein an A and B modem are connected by a telephone line and the means for determining equivalent noise comprises:

- 5 means for establishing a communication link between said A and B modems;
- means for accumulating line noise data during a no transmission time interval at said A and B modems;
- means for transmitting a first ensemble of
- 10 frequency carriers from said A modem to said B modem, where the amplitude of each carrier has a predetermined value;
- means for receiving said first ensemble at said B modem;
- 15 means for measuring the amplitude of each carrier received at said B modem;
- means for comparing the measured amplitudes at said B modem with said predetermined amplitudes to determine signal loss at each carrier frequency;
- 20 means for determining the value of the component, in dB, at each carrier frequency of the accumulated noise; and
- means for adding the signal loss at each carrier frequency to the noise component at each carrier
- 25 frequency to determine equivalent noise.

13. In a high speed modem, for transmitting data in the form of a QAM ensemble of carrier frequencies on a VF telephone line, of the type that measures the magnitude of a system parameter prior to transmission,

30 a system for tracking deviations in the magnitude of the system parameter during the receipt of data, said system comprising:

- means for generating QAM constellations for a plurality of carrier frequencies;
- 35 means for constructing a demodulation template for one of said plurality of carrier frequencies comprising a plurality of first regions with one of the

points of said constellation positioned within each of said first regions;

means for forming a set of tracking regions
5 where each first region has a first and second tracking region disposed therein;

means for demodulating said ensemble of carriers to obtain the modulation points positioned in said set of first and second tracking regions;

10 means for counting the number of points disposed in said set of first tracking regions and the number of points disposed in said set of second tracking regions;

means for determining the difference in the
15 number of counts disposed in said set of first tracking regions and disposed in said tracking regions to construct an error characteristic; and

means for utilizing said error characteristic to adjust the magnitude of said signal parameter during
20 the receipt of data.

14. The invention of claim 13 wherein said means for constructing a demodulation template comprises:

means for constraining said first regions to be in the shape of squares having said constellation
25 points centered therein.

15. The invention of claim 14 wherein said means for forming said tracking regions comprises:

means for dividing said squares into quadrants;
and

30 means for selecting said tracking regions to be symmetrically disposed quadrants.

16. In a communication system of the type including two modems (A and B) coupled by a transmission link, each modem having an input buffer for storing
35 data to be transmitted, a system for allocating control

of the transmission link between modem A and B comprising:

- means for allocating control of the transmission link to modem A;
- means for determining the number, K , of packets of data required to transmit the volume of data stored in the input buffer of modem A;
- means for transmitting L packets of data from modem A to modem B where L is equal to I_A if K is less than I_A but less than N_A , where L is equal to K if K is greater than or equal to I_A , and where L is equal to N_A if K is greater than N_A so that the minimum number of packets transmitted is I_A and the maximum is N_A ;
- means for allocating control of the transmission link to modem B;
- means for determining the volume of data in the input buffer of modem B;
- means for determining the number, J , of packets of data required to transmit the volume of data stored in the input buffer of modem B;
- means for transmitting M packets of data from modem B to modem A where M is equal to I_B if J is less than I_B , where M is equal to J if J is greater than or equal to I_B but less than N_B , and where M is equal to N_B if J is greater than N_B so that the minimum number of packets transmitted is I_B and the maximum is N_B ;
- where allocation of control between modem A and B is dependent on the volume of data stored in the input buffers of modems A and B.

17. In a high speed modem communication system including two modems (A and B) coupled by a transmission link, each modem having an input buffer for storing data to be transmitted, each modem for transmitting data over a telephone line and each modem of the type that encodes data elements on an ensemble of carrier frequencies, a method of operating said modems to effi-

ciently allocate power and data to the carrier frequencies, to compensate for frequency dependent phase delay, where the maximum estimated magnitude of the phase delay is T_{PH} , to prevent intersymbol interference, to allocate control of the transmission link between modem A and modem B and for initiating a sampling interval having a given time sample offset equal to the reciprocal of the sampling frequency, said method comprising:

5 determining the equivalent noise component for every carrier frequency in the ensemble;

10 determining the marginal power requirement to increase the complexity of the data element on each carrier from n information units to $n + 1$ information units, n being an integer between 0 and N ;

15 ordering the marginal powers of all the carriers in the ensemble in order of increasing power;

 assigning available power to the ordered marginal powers in order of increasing power;

20 determining the value, $MP(max)$ at which point the available power is exhausted;

 allocating power and data to each carrier frequency where the power allocated is equal to the sum of all the marginal powers less than or equal to $MP(max)$ for that carrier and the number of data units allocated is equal to the number of marginal powers for that carrier less than or equal to $MP(max)$;

25 transmitting a symbol encoded on one of said carrier frequencies where said symbol is a predetermined time duration, T_S ;

30 retransmitting the first T_{PH} seconds of said symbol to form a transmitted waveform of duration $T_E + T_{PH}$;

 allocating control of the transmission link to modem A;

35 determining the volume of data stored in the input buffer of modem A;

determining the number, K , of packets of data required to transmit the volume of data stored in the input buffer of modem A;

- 5 transmitting L packets of data from modem A to modem B where L is equal to I_A if K is less than I_A , where L is equal to K if K is greater than or equal to I_A , and where L is equal to N_A if K is greater than N_A so that the minimum number of packets transmitted is I_A and the maximum is N_A ;

- 10 allocating control of the transmission link to modem B;

 determining the volume of data in the input buffer of modem B;

- 15 determining the number, J , of packets of data required to transmit the volume of data stored in the input buffer of modem B;

- transmitting M packets of data from modem B to modem A where M is equal to I_B if J is less than I_B , where M is equal to J if J is greater than or equal to I_B , and where M is equal to N_B if J is greater than N_B so that the minimum number of packets transmitted is I_B and the maximum is N_B ;

- where allocation of control between modem A and B is dependent on the volume of data stored in the input buffers of modems A and B;

- 25 generating an analog waveform at modem A including first and second frequency components at f_1 and f_2 ;

- 30 transmitting said waveform from modem A to modem B at time T_A ;

 adjusting the phases of said first and second frequency components so that their relative phase difference at time T_A is equal to about 0° ;

- 35 detecting energy at frequency f_1 at modem B to determine the estimated time, T_{EST} , that said waveform arrives at modem B;

- determining the relative phase difference at modem B between said first and second frequency components at time T_{EST} ;
- 5 calculating the number of sampling time offsets, N_I , required for the relative phase of said first and second carriers to change from 0 to said relative phase difference; and
- 10 changing the magnitude of T_{EST} by N_I sampling intervals to obtain a precise timing reference, T_0 .

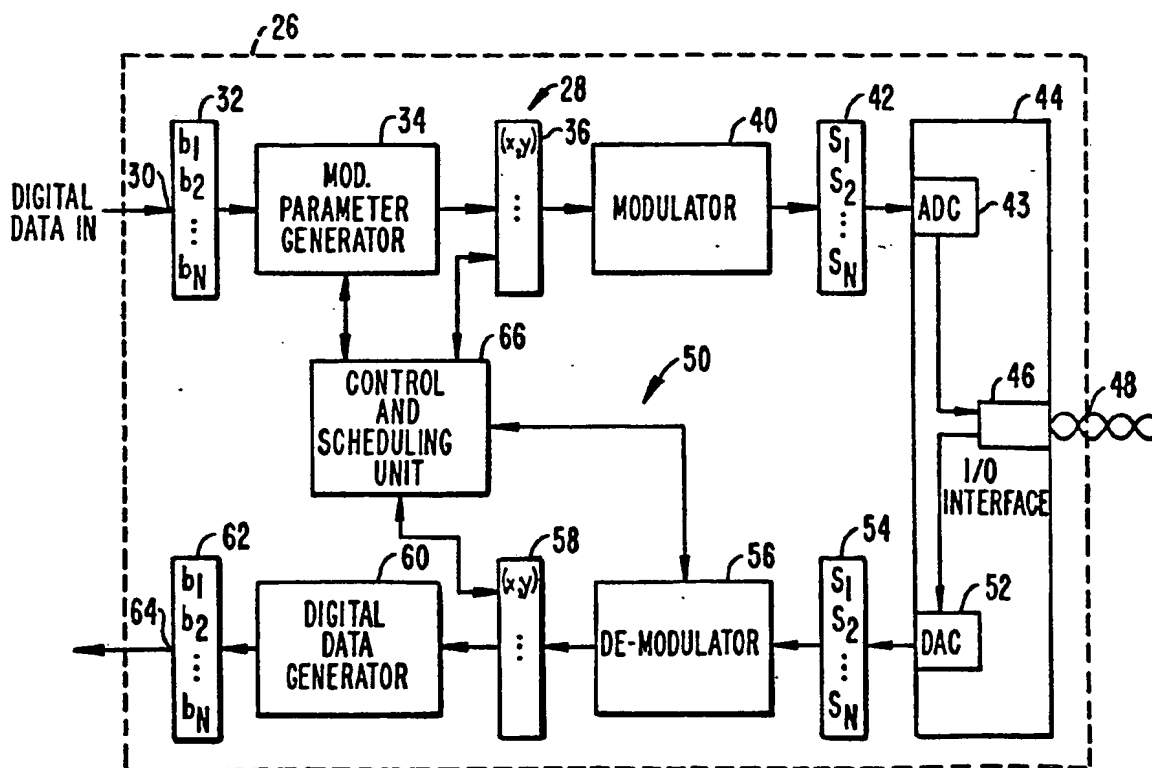
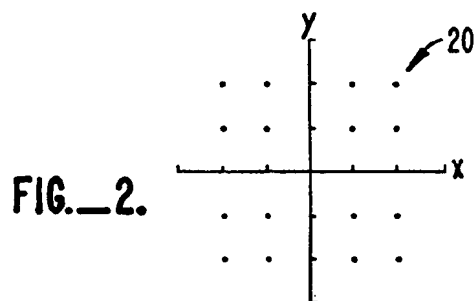
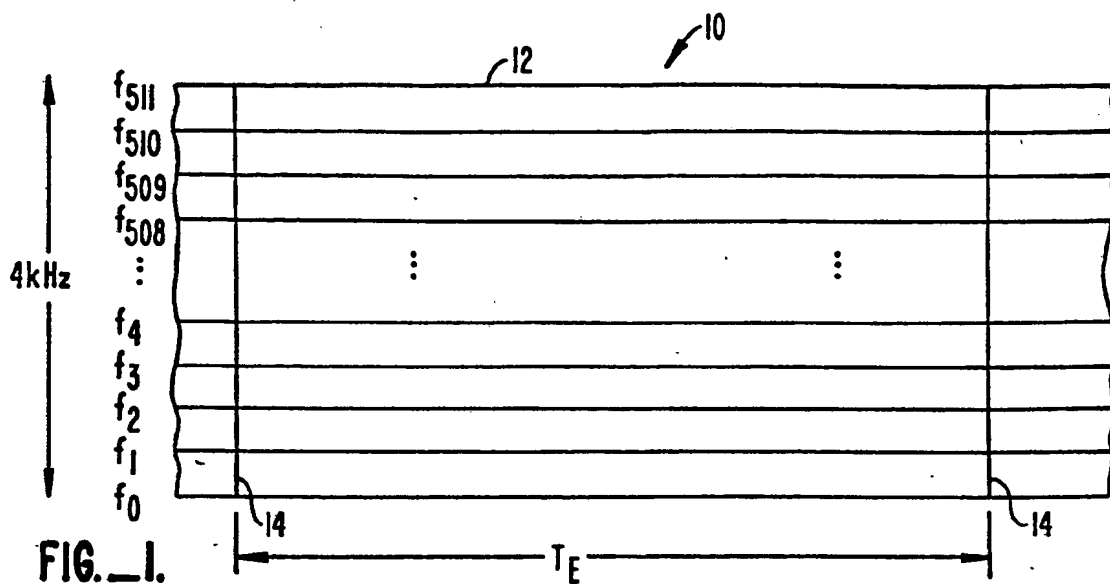


FIG. 3.

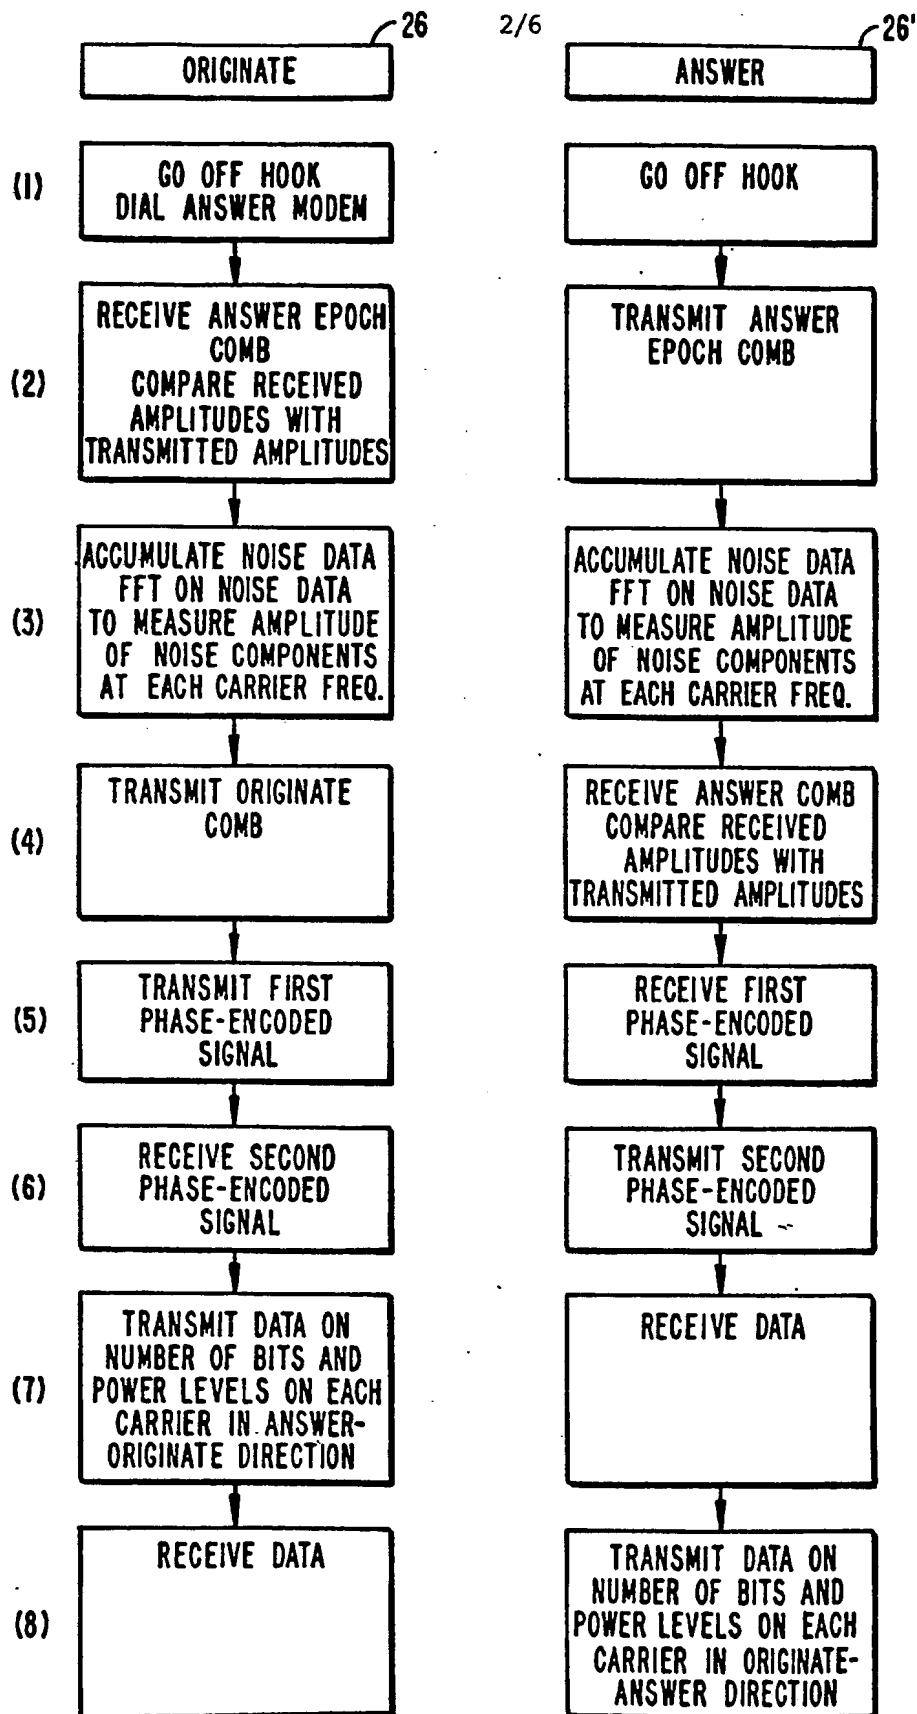


FIG. 4.


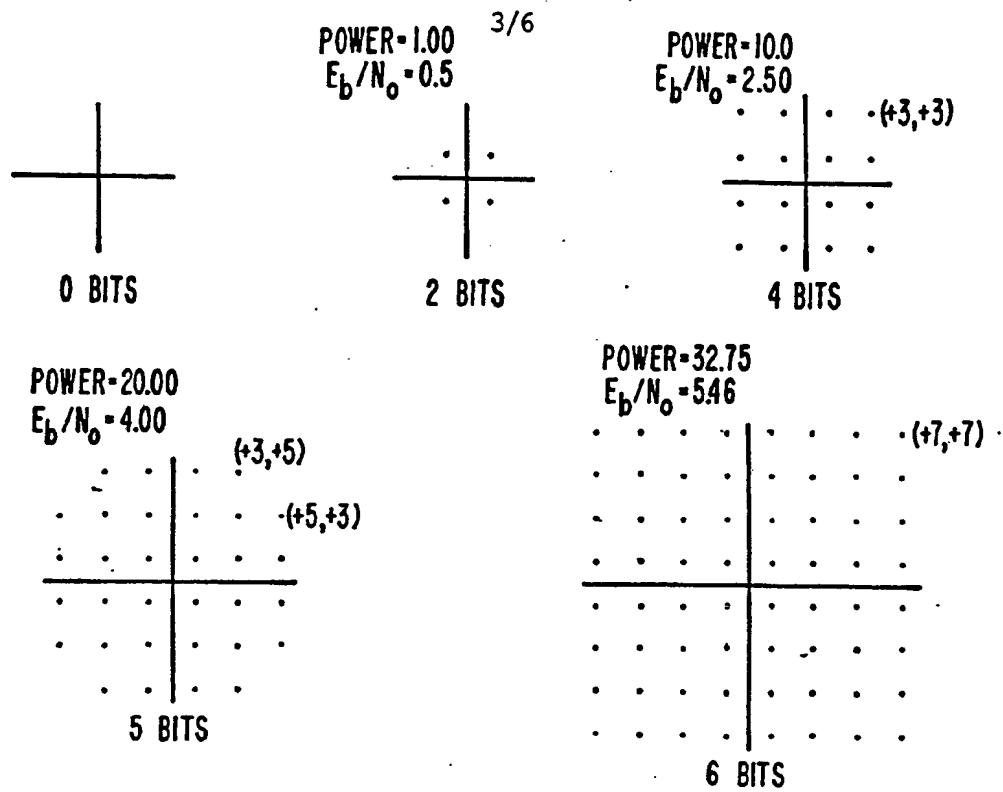


FIG. 5.

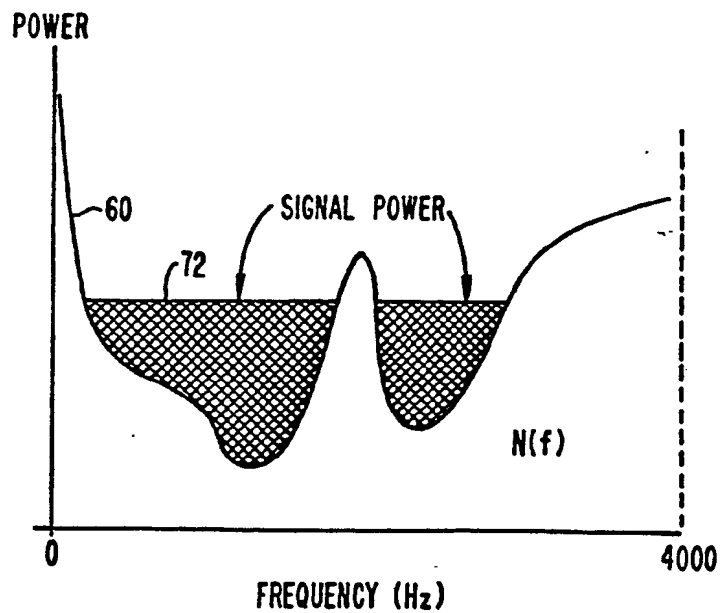

AREA LIMITED TO
SOME CONSTANT

FIG. 6.

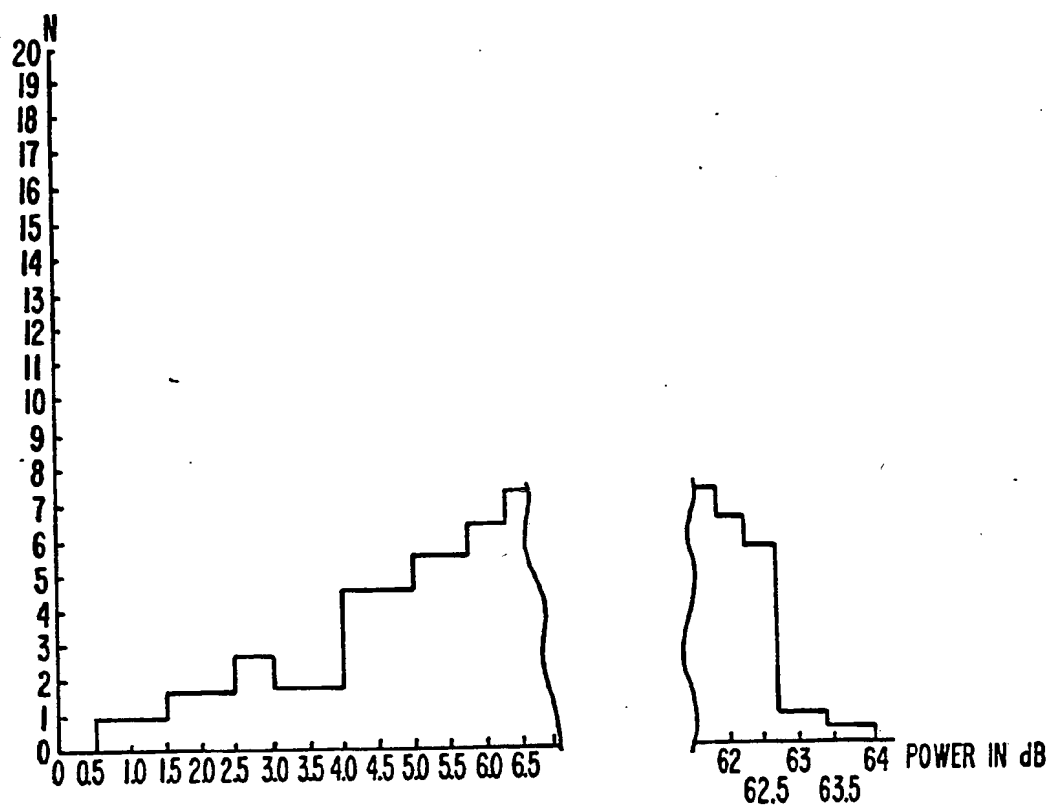


FIG. 7.

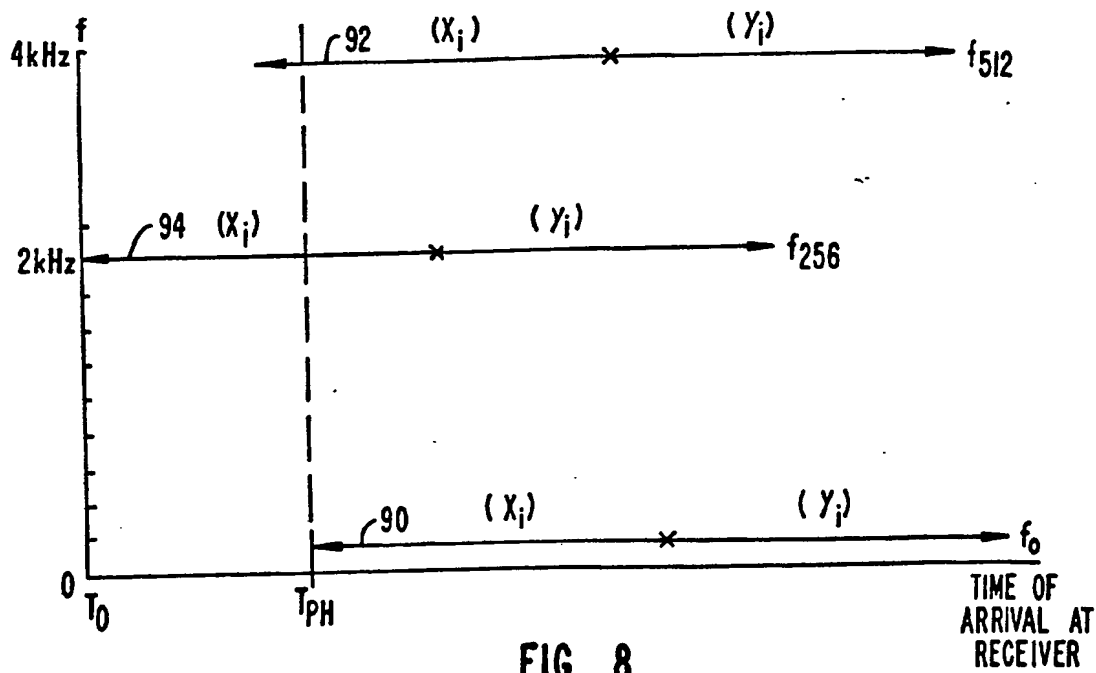


FIG. 8.

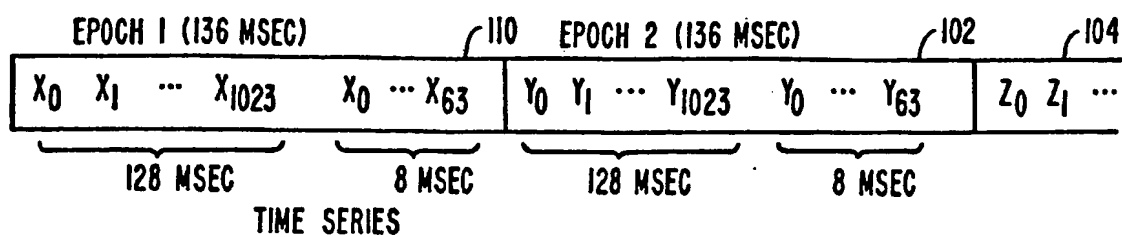


FIG. 9.

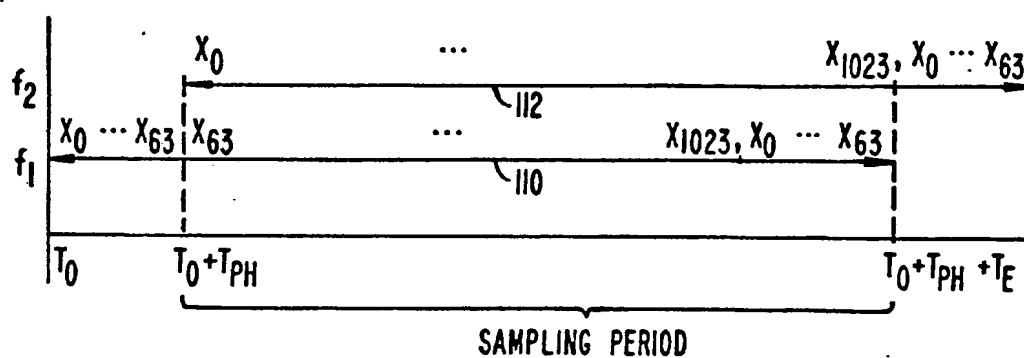


FIG. 10.

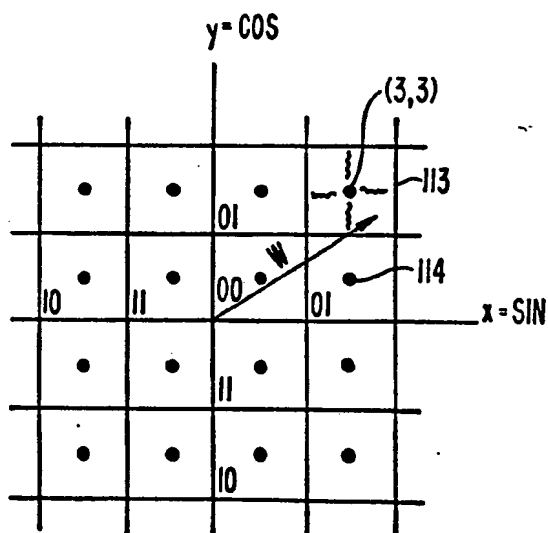


FIG. 11.

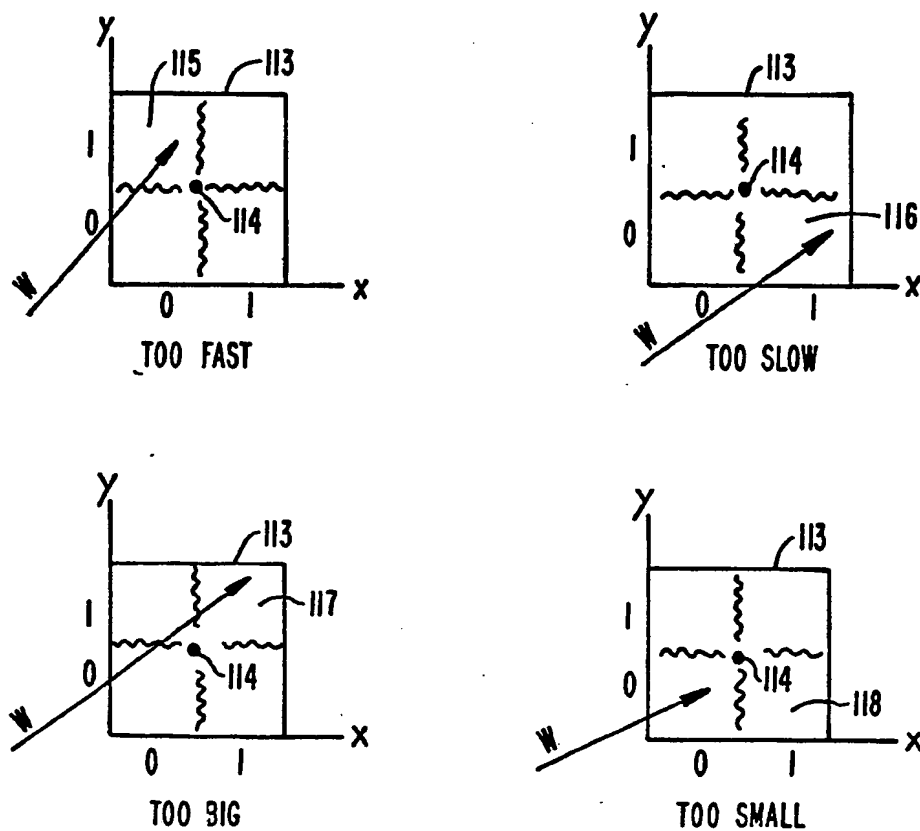


FIG. 12.

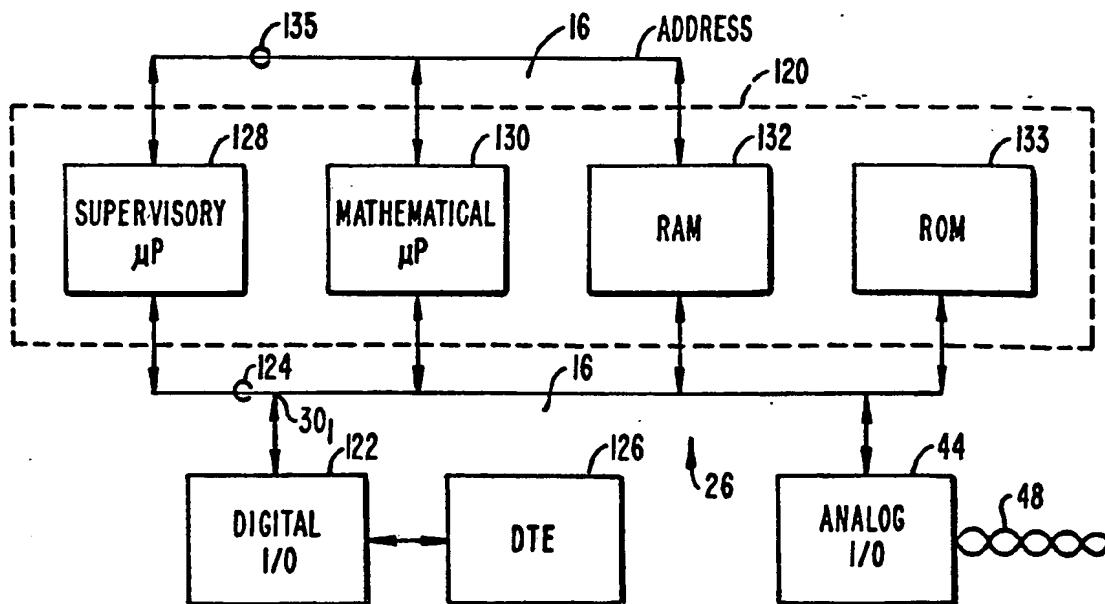



FIG. 13.

INTERNATIONAL SEARCH REPORT

International Application No PCT/US86/00983

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ³		
According to International Patent Classification (IPC) or to both National Classification and IPC IPC (4): H04M 11/00; H04B 15/00, 1/10; H04L 5/00, 25/08; H04B 1/10 U.S. Cl.: 179/2DP; 375/39, 58, 99; 455/63		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
U.S.	179/2DP; 375/38, 39, 40, 58, 118; 370/16, 108; 455/63, 68+; 340/825.15	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁶	Citation of Document, ¹⁶ with Indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
X,P	Telecommunications, Volume 19, No. 10, issued October 1985 (Dedham, Massachusetts), H.R. Johnson, "PC Communications: The Revolution Is Coming", see pages 58j to 58r.	1-17
A	US, A, 4,438,511 (Baran) 20 March 1984	1-17
A,P	US, A, 4,559,520 (Johnston) 17 December 1985	1-17
A	US, A, 4,206,320 (Keasler et al.) 03 June 1980	1-17
A	US, A, 3,810,019 (Miller) 07 May 1974	1-5, 10-12, 17
A	US, A, 4,328,581 (Harmon et al.) 04 May 1982	1-5, 10-12, 17
A	US, A, 3,971,996 (Motley et al.) 27 July 1976	6-8, 13-15
A,P	US, A, 4,555,790 (Betts et al.) 26 November 1985	6-8, 13-15
(cont'd)		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>¹⁴ Special categories of cited documents: ¹⁴</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 50%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ¹	Date of Mailing of this International Search Report ²	
17 June 1986	10 JUL 1986	
International Searching Authority ¹	Signature of Authorized Officer ²⁰	
ISA/US	 Matthew E. Connors	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No ¹⁸
A	US, A, 3,783,385 (Dunn et al.) 01 January 1974	1-5
A	US, A, 4,047,153 (Thirion) 06 September 1977	1-5
A	US, A, 4,494,238 (Groth, Jr.) 15 January 1985	1-5
A	US, A, 4,495,619 (Acampora) 22 January 1985	1-5,10-12,17
A	US, A, 4,484,336 (Catchpole et al.) 20 November 1984	1-5,10-12,17
A	US, A, 4,459,701 (Lamiral et al.) 10 July 1984	9,16,17
A	US, A, 3,755,736 (Kaneko et al.) 28 August 1973	9,16,17
A	US, A, 4,315,319 (White) 09 February 1982	1-5,10-12,17
A,P	US, A, 4,573,133 (White) 25 February 1986	1-5,10-12,17
A	US, A, 4,392,225 (Wortman) 05 July 1983	1-5,10-12,17